




NVS4



4-Channel PoE NVR for 24/7 Reliable Recording

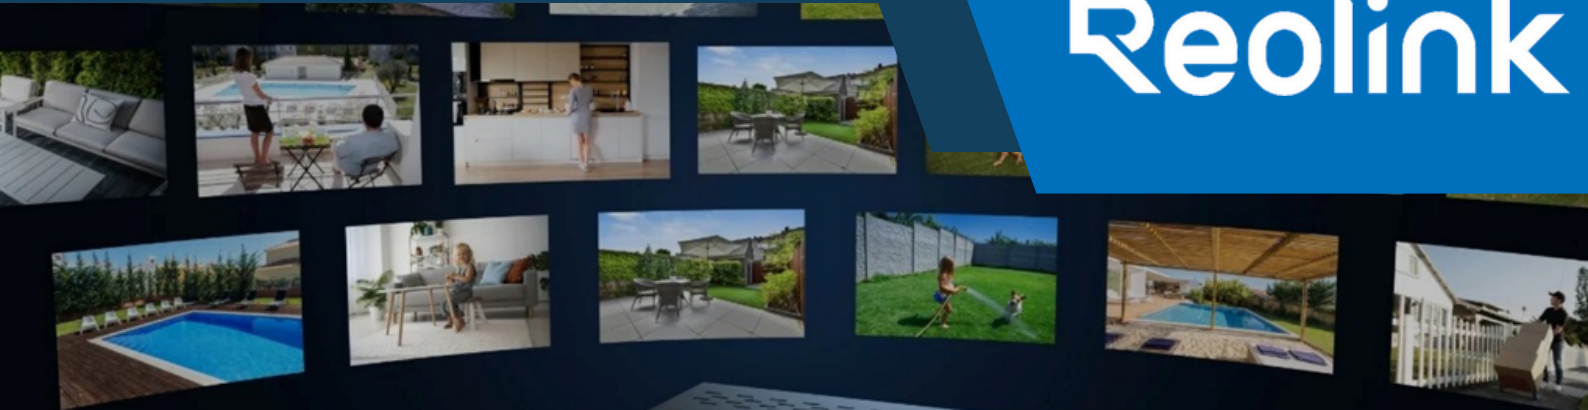

SPECIFICATIONS

VIDEO AUDIO INPUT/ OUTPUT

IP Video Input
PoE IP Camera x 4

Audio Input
None

HDMI Output Resolution
3840x2160, 1920x1080,
1280x1024, 1280x720,
1024x768

VGA Output Resolution
1920x1080, 1280x1024, 1280x720,
1024x768

Audio output
1-Channel, RCA

DECODING

Video Format
H.264, H.265

Live View / Playback Resolution
7680x2160, 4608x1728; 4512x2512,
4096x3072, 3840x2160, 2560x2560,
2560x1920, 2560x1440, 2048x1536,
2304x1296, 1080p, 720p

Synchronous Playback
Up to 4 channels

HDD

SATA
1 x SATA interface

External HDD
None

Capacity
Up to 6TB

EXTERNAL INTERFACE

USB Interface
2 x USB 2.0

Network Interface
• 1, RJ-45 10/100 Mbps self-adaptive Ethernet interface for LAN/WAN
• 4, RJ-45 10/100 Mbps self-adaptive PoE Ethernet interface for IP camera

POE

Max. Power Per Port
25W

Supported Standard
IEEE 802.3af/at

NETWORK

Network Protocols
HTTP, TCP/IP, UDP, DHCP, P2P,
UPNP, RTSP, SMTP, SSL/TLS,
DNS, DDNS, NTP, FTP

Browsers Supported
Edge, Firefox, Chrome, Safari

OS Supported

PC: Windows, Mac OS;
smartphone: iOS, Android

Max. User Access

20 users (1 admin account & 19 user accounts); supports up to 12 simultaneous video streams (10 substreams & 2 mainstreams)

GENERAL

Power Supply
DC 52V

Working Environment
Temperature: -10°C~+45°C
(14°F~113°F);
humidity: 10%~90%

Power Consumption
<10W (Without HDD&PoE)

Dimensions
255 x 49.5 x 232mm

Weight
1.4kg

WARRANTY

Limited Warranty
2-year limited warranty. For support, visit <https://support.reolink.com/hc/en-us/>.